




QuietSound II™

QUALIFIES FOR EXECUTIVE ORDER 13101 AND GREEN BUILDING COUNCIL LEED CERTIFICATIONS

For use with laminate, hardwood, and engineered wood floor systems and most ceramic and stone tile installations.

U.S. Rubber Recycling Inc. is pleased to introduce its premium quality sound control acoustical underlayment, QuietSound II™ Rolled Underlayment. Not only does QuietSound II™ prevent the annoying sound transmission of foot traffic to the floors below, it also effectively deadens the transmission of interior noise such as from stereos and voices.

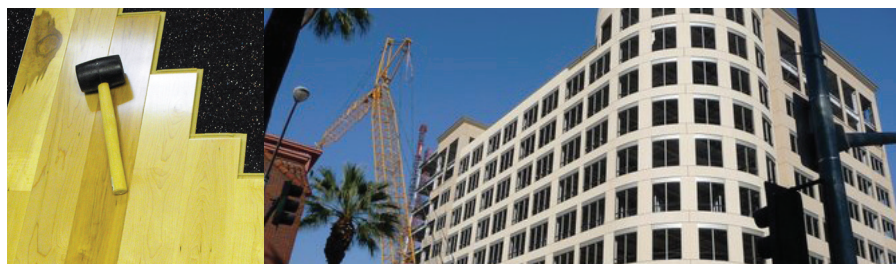

Crack Suppression and Cushioning Capabilities

QuietSound II™ acts as a crack suppression membrane when installed over concrete floors which are known to crack over time, preventing cracks as large as 1/4" from damaging the flooring above. Plus, QuietSound II™ emits no Volatile Organic Compounds (VOC's), no formaldehyde, other aldehydes or urea. In addition, QuietSound II™ cushions and insulates ceramic and laminate floors without that artificial "springy" feeling.

Variety of Thicknesses Available

QuietSound II™ can be ordered in a variety of thicknesses to suit your needs including 3mm, 5mm, 6mm, 9mm, and 12mm. While this availability provides for budgetary and cost requirements, many architectural specifications require the finished flooring to be raised a precise amount over the subfloor and QuietSound II™ can provide that accuracy-all at a price well below most competing products.

U.S. Rubber
RECYCLING, INC.

www.usrubber.com

